




Advanced
Automation
Systems

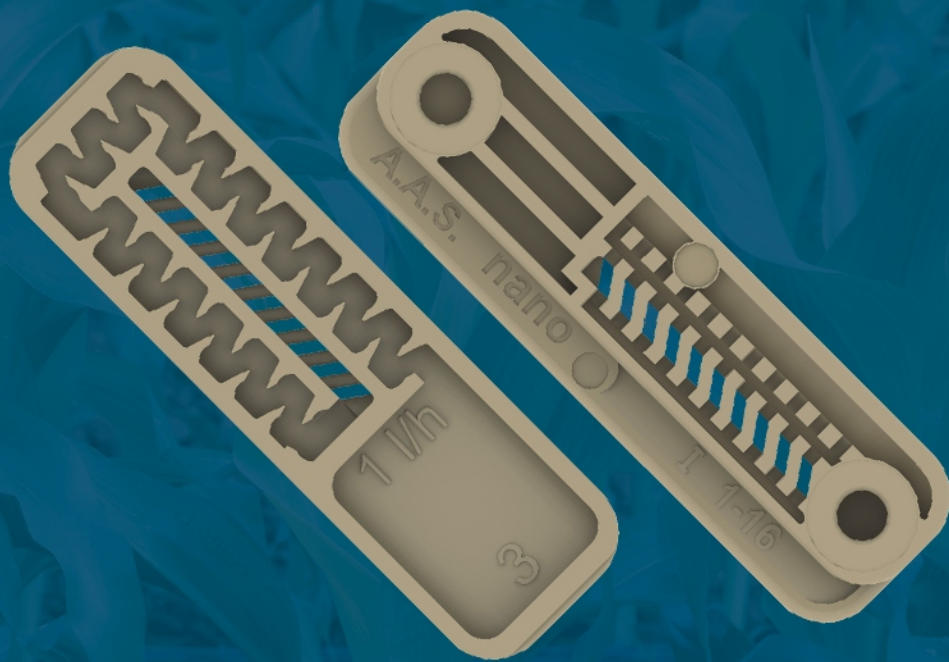

Nano


Flat Turbulent Emitter

The most affordable approach for the end user due to the small weight and dimensions of the emitter

Nano

Flat Turbulent Emitter

The most affordable approach for the end user due to the small weight and dimensions of the emitter.

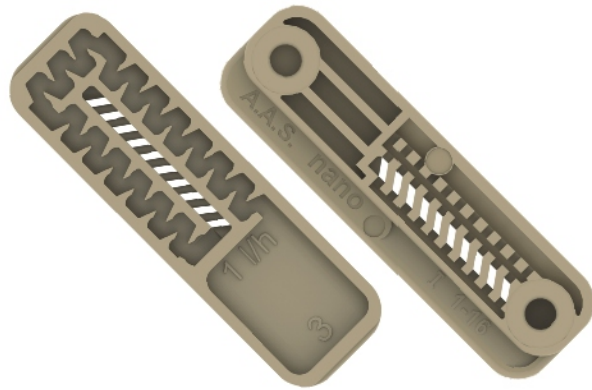

The small dimensions of Nano emitter along with its curved edge design provide a very low kd factor resulting in extremely low friction losses of water flowing inside the dripline.

Emitter Flow Path

One of the most important elements in the design of an emitter is the flow path. Its width, depth and length determine the flow rate of the emitter in liters per hour but most importantly determines their anti-clogging ability. A highly turbulent flow design creates multiple vortexes inside the flow path and therefore prevents clogging.

Emitter Characteristics

Wide range of flow rates from 0,6 to 2,0 l/h.
State of the art combination of performance and manufacturing technology enable emitter spacings starting from 10 cm and wall thicknesses from 5 mil and greater.
Suitable for driplines with any diameter from 12 mm and on.
Superior and efficient emitter design enables very high downstream production speeds.

Excellent Coefficient of Variation (CV), far superior to labyrinth tape products, due to the long length of the finely tuned labyrinth. Specially designed labyrinth creates turbulent flow, thus preventing clogging of the emitter.

Advanced Three-Dimensional water inlet increases filtering area, thus enhancing the anti-clogging performance of the emitter.

Cost efficient, due to its ultracompact design.

The finished coils contain more meters for the same outer dimensions, resulting at lower logistics costs per meter, compared to other thin wall and tape products.

Product Applications


Row crops
Vegetables
Gardening
Suitable for both on surface and shallow subsurface installations depending on wall thickness

Nano Design Characteristics

3D Filtration Area

The unique 3D filtration area of Nano prevents particle insertion into the emitter. The inlet design provides a filtration area larger than much bigger emitters

Nano emitters are tested from both CIT and Irstea institutes and achieved the highest ranking for CV, emission uniformity, flow accuracy and clogging resistance

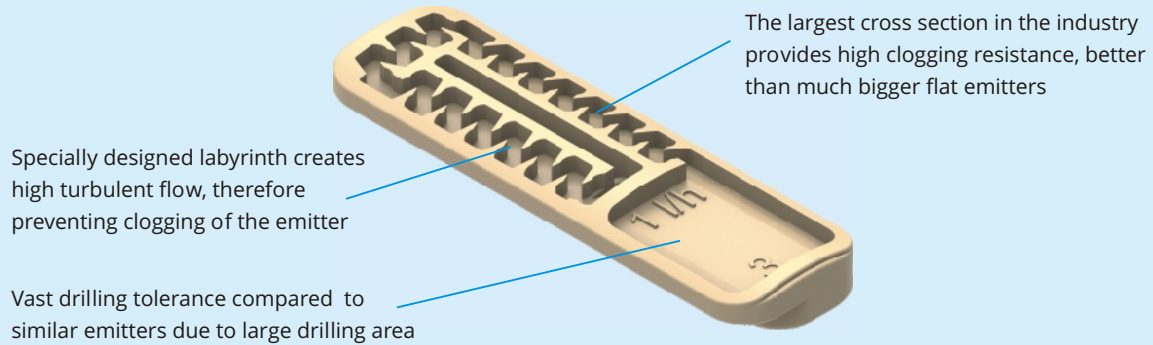

Actual Size



Packaging



50.000 pcs



120 boxes
6.000.000 pcs



11 pallets
66.000.000 pcs




22 pallets
132.000.000 pcs

Nano Emitter Specifications

Nominal Flow Rate (l/h @ 1bar)	Constant k (bar)	Exponent (x)	Coefficient of Variation CV (%)	Water Passage Width x Depth x Length (mm)	Filtration Area (mm ²)	Recommended Filtration (mesh/micron)
0,6	0,60	0,48	1,90	0,51 x 0,46 x 44,2	28,20	150/100
1,0	1,09	0,46	1,15	0,59 x 0,60 x 41,9	28,20	120/130
1,6	1,60	0,47	1,80	0,69 x 0,65 x 40,0	28,20	120/130
2,0	2,13	0,49	1,50	0,80 x 0,65 x 38,2	28,20	120/130

Nano Emitter Flow Curves

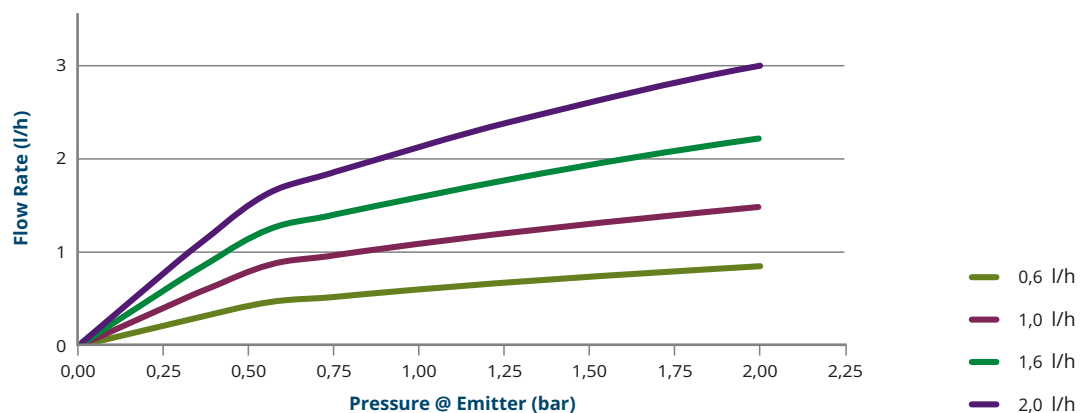



Showroom:

10 Andrea Araouzou str.,
3056 Limassol, Cyprus

Head Office:

12 Andrea Araouzou str.,
3056 Limassol, Cyprus

Factory:

9 Fytion str.,
3056 Limassol, Cyprus

T: + 357 25 399962

F: +357 25 399963

aas@aasystems.eu