




Advanced  
Automation  
Systems

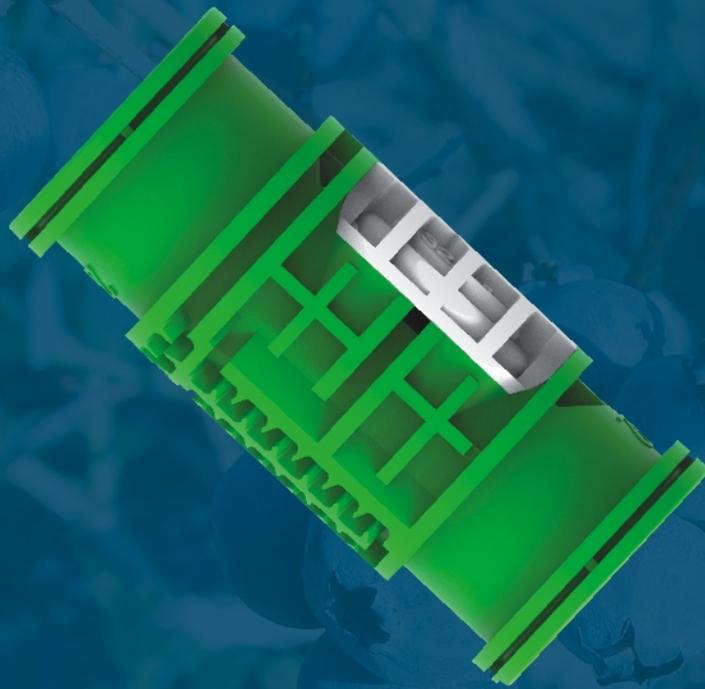

# Triton PC

## Cylindrical PC Emitter

The most durable Pressure Compensating emitter, designed for steep and rocky terrain, permanent crops with long laterals, on surface and subsurface applications

# Triton PC

## Cylindrical PC Emitter

**The most durable Pressure Compensating emitter, designed for steep and rocky terrain, permanent crops with long laterals, on surface and subsurface applications.**



### **Pressure Compensating (PC)**

Triton PC emitters incorporate a silicone membrane which enables the delivery of precise and equal amounts of water over a broad pressure range. Triton PC emitters are designed for precision irrigation needs, hard rocky terrain and inclined topography.

### **Drain (D), Non-Drain (ND) and Anti-Siphon (AS) Options**

The Anti-Siphon (AS) system is a specially designed mechanism that prevents suction of dirt and impurities into the emitter. The AS feature enables Triton PC to be installed underground (SDI), perfectly maintaining its irrigation characteristics and its multi-year durability.

With the Non-Drain system of Triton PC, the dripline remains full of water during irrigation intervals, ensuring immediate and uniform irrigation along the dripline. Non-Drain emitters eliminate drainage and refill effect and improve efficiency in pulse irrigation.

In order to achieve the Non-Drain function, the emitter opens at 0,30 bar and closes at 0,18 bar.

### **Emitter Characteristics**

Available in two flow rates 2 and 4 l/h.

Suitable for driplines with 16mm diameter. Manufactured from the finest raw materials that provide durability and long-lasting performance.

Wide and accurate water passages along the labyrinth.

Special labyrinth design that ensures high turbulent flow of the water.

Continuous self cleaning mechanism ensures non-clogging uninterrupted operation.

High UV resistance.

Resistant to all nutrients used in agriculture.

Injected molded emitters with excellent Coefficient of Variation (CV).

Excellent for effluent water reuse.

Wide pressure compensation range.

### **Product Applications**

Precision irrigation

Uneven terrain

Row crops

Orchards

Landscaping

Gardening

Pulse irrigation

Suitable for both on surface and subsurface installations

## Triton PC Design Characteristics


### Robust Design

Robust design with no holes or cutouts for housing the silicone membrane, provides perfect symmetry and enables better inserting and drilling at high speed


Advanced water inlet design with industry leading filtration area

The large cross section along with the high turbulent flow path, provides high clogging resistance

Triton PC emitters are tested from both CIT and Irstea institutes and achieved the highest ranking for CV, emission uniformity, flow accuracy and clogging resistance

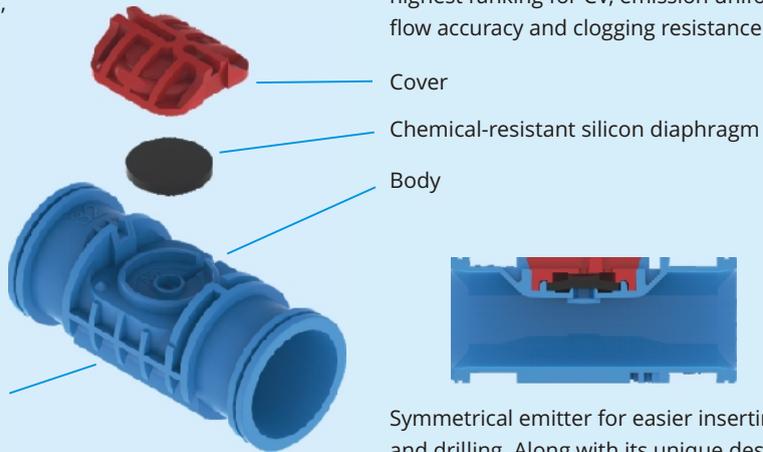

Actual Size



### Packaging


7.000 pcs	30 boxes 210.000 pcs	10 pallets 2.100.000 pcs	20 pallets 4.200.000 pcs

## Triton PC Emitter Specifications

Nominal Flow Rate (l/h)	Constant k (bar)	Exponent (x)	Coefficient of Variation CV (%)	Water Passage Width x Depth x Length (mm)	Filtration Area (mm <sup>2</sup> )	Recommended Filtration (mesh/micron)
2,0	2,0	0,0	3,1	1,10 x 1,20 x 62,7	14,00	120/130
4,0	3,8	0,0	2,5	1,30 x 1,20 x 51,9	14,00	120/130

Pressure range: 0,5 - 4,0 bar  
Opening pressure: 0,30 bar  
Closing pressure: 0,18 bar

## Triton PC Emitter Flow Curves

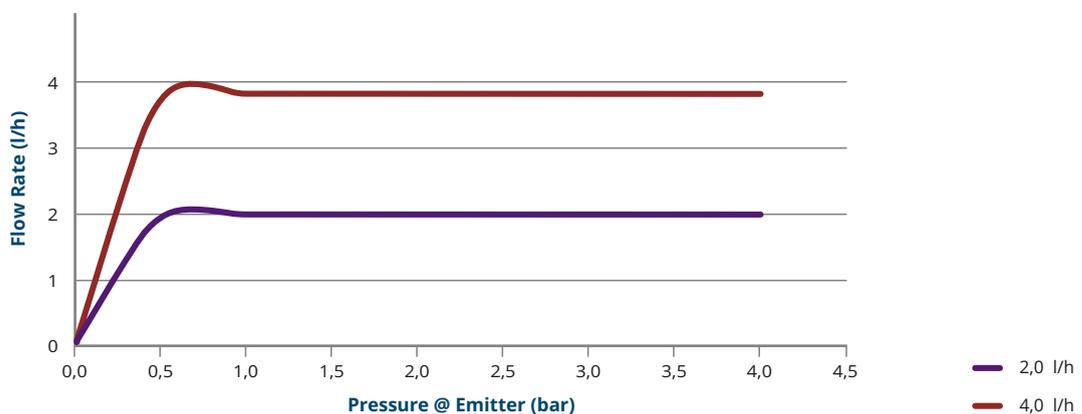



**Showroom:**

10 Andrea Araouzou str.,  
3056 Limassol, Cyprus

**Head Office:**

12 Andrea Araouzou str.,  
3056 Limassol, Cyprus

**Factory:**

9 Fytion str.,  
3056 Limassol, Cyprus

T: + 357 25 399962

F: +357 25 399963

[aas@aasystems.eu](mailto:aas@aasystems.eu)